




	CPU	1 x Socket R3 (LGA 2011) Intel® Xeon® Grantley Haswell/Broadwell TDP 160W QPI (9.6 GT/s)
		Intel®C612
	BIOS	AMI UEFI BIOS
		8 (4 /CPU, 8-DIMM /CPU) 2400/2133MHz ECC DDR4 RDIMM, LRDIMM
		4GB, 8GB, 16GB 32GB 256GB RDIMM 1TB 3DS LRDIMM
		1 RJ45 2 10/100/1000Mbps Intel i210
		1 SFP+ 2 10/1GbE Intel 82599ES Dual Port
	IPMI	1 RJ45 10/100/1000Mbps
	I/O	2 x USB 3.0 2 x USB 2.0 1 x VGA 1 x COM
		1 x UID LED 2 x RJ-45 1GbE LAN 2 x SFP+ 10GbE LAN 1 x RJ-45 IPMI
	I/O	1 x TPM 1 x TPM ATX 24+8+4 pin 1 x PMBus
		2 x USB 3.0 4 x USB 2.0 1 x USB2.0 Type A
		7 x 4pin , 1 x 1 x
	SATA	10 SATA3 6Gb/s Raid 0 1 5(6 7PIN SATA iSATA + 4 7PIN SATA(sSATA))
	PCI-E	4 PCIe 3.0 x8 x16
		ASPEED AST2400 BMC
		1 x VGA
		12.01" x 9.96" (30.51cm x 25.29cm)
		10°C to 35°C
		-40°C to 70°C
		8% to 90%
		5% to 95%

02 Product view

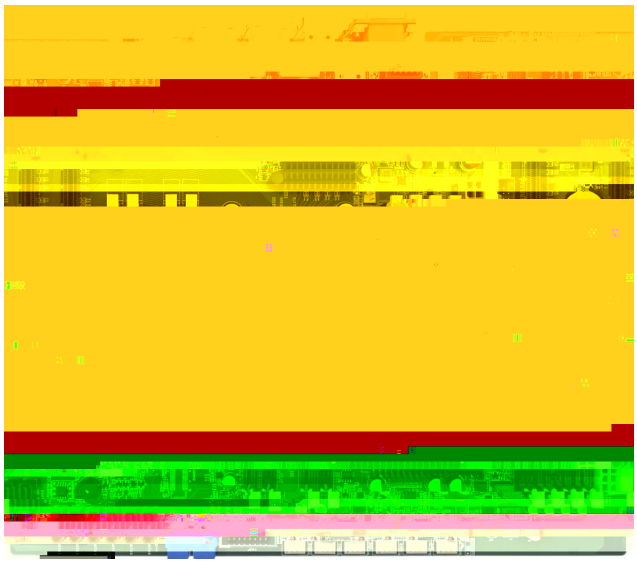

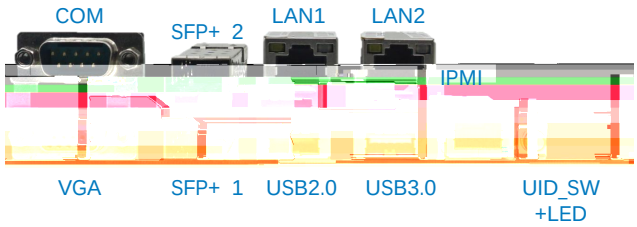

03 Dimensions

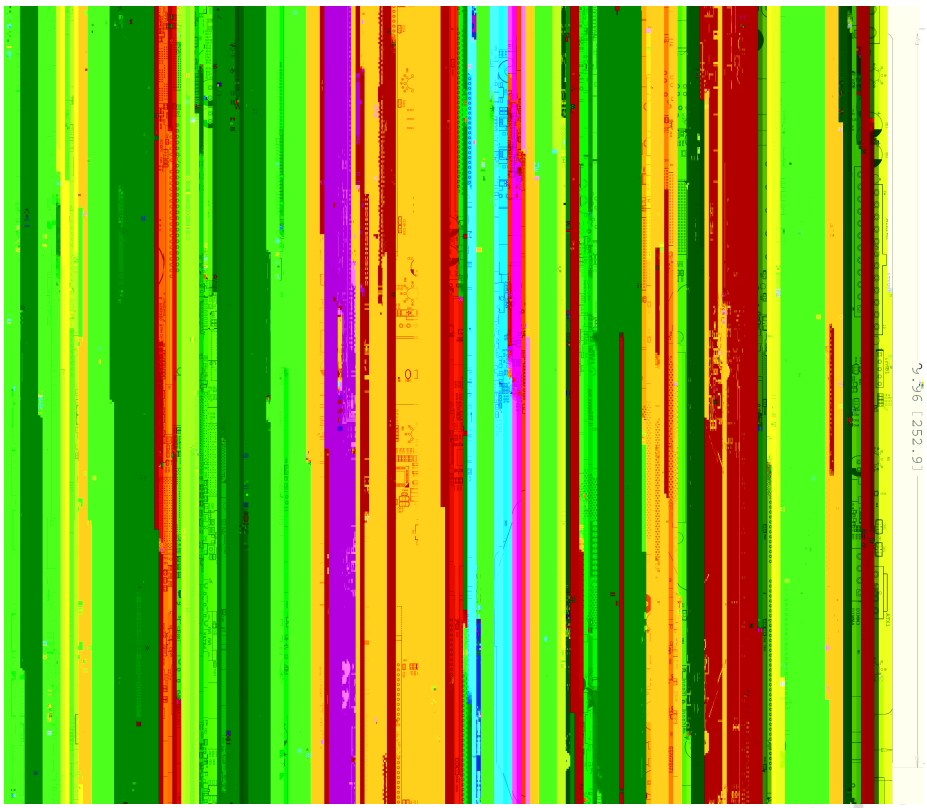

04 Product Selection

P8SCA-N4I-1	Intel® Xeon® E5-1600 v3/v4	E5-2600 V4/V3	C612	8*DIMM	2*	SFP+	2*	RJ45	IPMI
P8SCA-N4I-2	Intel® Xeon® E5-1600 v3/v4	E5-2600 V4/V3	C612	8*DIMM	2*	RJ45	IPMI		