
H076
简易指南



1.包装清单

G

h h

G


ㄋ x 1 ㄋ x 1

ㄋ x 1 ㄋ x 1

2.产品规格

	- RK3576
	- A G52 C3 G
	- L DD 4 4GB
	- 1 x EMMC5.1 32GB/64GB - 1 x Micro SD
	- 1 x R45 h 10/100/1000Mbps
Wireless	- Module h WIFI+BT h XB547NF WiFi6/BT5.2
IO	- 1 rB B L - 1 x Recovery - 1 B 3.1 G 1 -A - 1 x USB 2.0 Type-C h OTG - 1 I - 1 x MIC-in & Line-out - 1 X TF card h 1 X Micro SIM Card
IO	- 2 x HDMI OUT - 1 x HDMI IN - 1 x USB3.0 h 1 x USB2.0 - 1 x R45 With POE PD-In - 1 x DC IN
IO	- 1 x RS232 COM - 2 x ANT
IO	- 1 x - 2 x ANT ÿ ÿ
	- Android 14
	- 12V/3A DC IN
	- ч -5ue~50ue h ч -20ue~70ue - ч 10%~90%
	- 149 128 27

3.IO接口




I r B
I Recovery h
I TF TF
I SIM SIM
I -C TYPE-C
I B3.0 USB3.0
I Hυ
I DC IN DC
I LAN RJ-45
I USB 2.0/USB3.0 USB2.0/USB3.0
I HDMI OUT
I HDMI IN
I ANT

产　中有害物质的名称及含量

	(Pb)	(Hg)	(Cd)	(Cr(VI))	(PBB)	(PBDE)
	X	O	O	O	O	O
	X	O	O	O	O	O
CPU	X	O	O	O	O	O
SSD	X	O	O	O	O	O
	X	O	O	O	O	O
	X	O	O	O	O	O
	X	O	O	O	O	O
WIFI	X	O	O	O	O	O
	X	O	O	O	O	O
	O	O	O	O	O	O

O ч　　GB/T 26572 Ə　　ə
ɢ
X ч　　GB/T 26572 Ə　　ə
h　　Ə　　ə ɢ
* ч　　h　　Hʊ　　Hʊ　　Hʊ　　ɢ

H076
Simple User's Guide

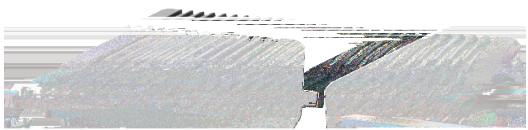

1.Pac a e C ec


r r r .
B r r r , r r ,
r r r , r
r .
ㄋ 1 ㄋ r G 1
ㄋ rA r 1 ㄋ 1

2.Product Configuration


C	- K3576
Gr	- A G52 C3 G
r	- L DD 4 4GB
r	- 1 x EMMC5.1 32GB/64GB - 1 x Micro SD card
E r	- 1 x RJ45, 10/100/1000Mbps
Wireless	- Module, WIFI+BT, XB547NF WiFi6/BT5.2
Fr l r	- 1 x PowerButton with Blue Led - 1 x Recovery - 1 x USB 3.1 Gen1 Type-A - 1 x USB 2.0 Type-C, support OTG - 1 x IR - 1 x MIC-in & Line-out Two In One connector - 1 X TF Card, 1 X Micro SIM Card
r l r	- 2 x HDMI OUT - 1 x HDMI IN - 1 x USB3.0, 1 x USB2.0 - 1 x RJ45 With POE PD-In - 1 x DC IN
L l r	- 1 x RS232 COM - 2 x ANT
l r	- 1 x Kensington Lock - 2 x ANT (Reserve)
r	- Android 14
r l	- 12V/3A DC IN
E r	- Operating Temperature: -5ue~50ue - Storage Temperature: -20ue~70ue - Operating Humidity: 10%~90%(non-condension)
D	- 149 128 27

3.IO I e face


Front panel

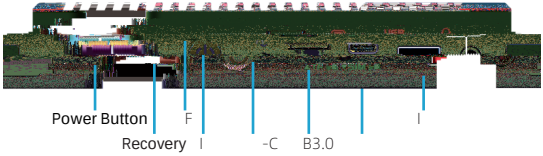

Rear panel

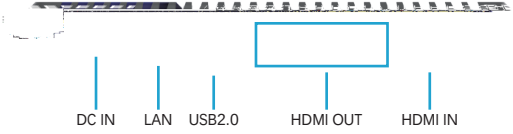

Left panel

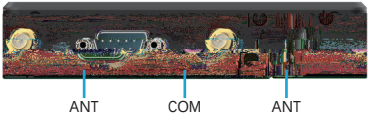

Right panel



r B : r r , r
r : L r r , r r r
r r r
F: F C r
I : I C r
-C: E-C C r
B3.0: B3.0 C r
2- -1 I r : H r 2- -1 I r
DC I : DC r I r
LA : J-45 r r
B 2.0/ B3.0: B2.0/ B3.0 C r
HD I : H D D I r
HD II : H D D I I r
A : A r
C : 232 r r
K L : K L J

r 15 FCC . r
r r (1)
r r r , (2)
r r r , r r r r .

r r r .

E: r
C B , r r 15 FCC . r
r r r r r r
r . r , r r
r r , r r ,
r r r r . H r, r
r r r r r r .

- r rr r .
- l r r r.
- C r r FCC r . 6r