

IPC-1U420-Z390


Intel 6/8/9 i3/i5/i7/i9 CPU
1U



- ATX Micro-ATX Mini-ITX
- 2 3.5 ” 2 2.5"
- 1 PCI/PCIE
- 150W~500W Flex 1U
- 3 4020
-

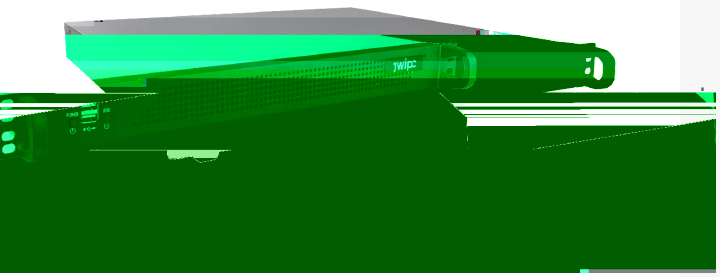

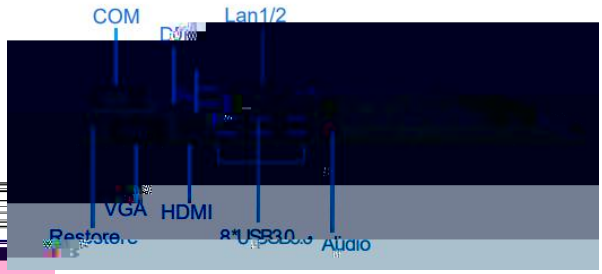

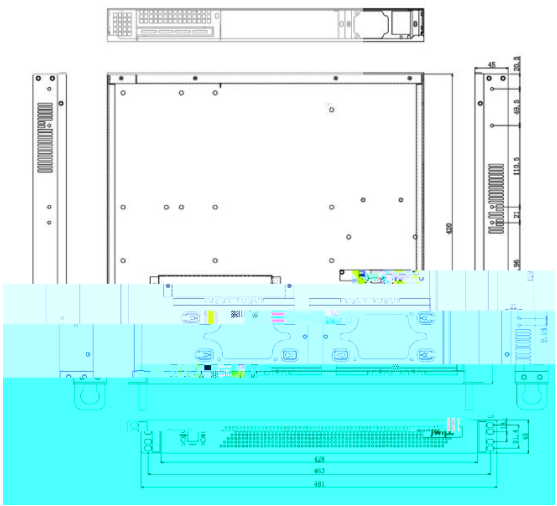

IPC-1U420-Z390

		Intel LGA1151 6/8/9 i3/i5/i7/i9 CPU, TDP 95W
		Intel® Z390
	BIOS	AMI UEFI BIOS
		Intel CPU (CPU)
		4× 288PIN DDR4 U-DIMM 32GB 128GB
I/O	USB	8 USB3.0 2 USB2.0
	COM	6 (COM1&2 RS232/422/485,COM3-6 RS232) 5 PCIE
	LED	POWER LED HDD LED
	PCIE / PCI / M.2	1 PCI/PCIE
	Interface	DP+HDMI+VGA,
	Storage Device	4 SATA 3.0 (6 Gb/s) Ports SATA Raid 0/1/5/10 1 M.2 2242/2280 Key-M SATA/Nvme
	Drive Bay	2 3.5 ” 2 2.5"
	Audio Codec	Realtek ALC897
	Audio Interface	IO MIC-In, Speaker-Out, Line-In F_Audio
	LAN	2 Intel : LAN1: i219V; LAN2: i210AT
	Power Input	Flex
	OS Supports	Win7/Win10/WES7/Linux , 32 /64
	Watchdog Timer	255 /
	TPM	SLB9670(SLB9672) TPM2.0( )
	System Fan	3 4020
	Dimensions	430mm*45mm*420mm (W x H x D)
	Weight	5KG
	Mounting	Desk/Rackmount
	Operating Temp.	0 45
	Storage Temp.	-40 55
	Humidity	20% 80% 20% 93%(40)
	Shock	1Grms@5~500Hz , 2Grms@5~500Hz
	Vibration	3 10G 11ms , 3 /

IPC-1U420-Z390

	PCH			SATA	LAN	USB3	USB2	COM	PCIE PCI
IPC-1U420	Z390	150W~500W	3	2	2	8	2	1	1

■

400302612900	IPC-1U420
400302613100	IPC-1U420 , ,L=1.5M, ,

■

DDR4 8G	DDR4 8GB,2666MHz,UDIMM
DDR4 16G	DDR4 16GB,3200MHz,UDIMM
DDR4 32G	DDR4 32GB,3200MHz,UDIMM
SSD 256GB	256GB,2.5 inch,SATA 6Gb/s
SSD 512GB	512GB,2.5 inch,SATA 6Gb/s
SSD 1TB	1TB,2.5 inch,SATA 6Gb/s
HDD 1TB	1TB,64M,SATA 6Gb/s,3.5inch,5400Rpm
HDD 2TB	2TB,256M,SATA 6Gb/s,3.5inch,7200Rpm
HDD 4TB	4TB,256M,SATAIII,3.5inch,7200Rpm
HDD 10TB	10TB,256M,SATA 6Gb/s,3.5inch,7200Rpm

所有产品规格如有更改，不